



# Microsoft Band 2 Buttons Replacement

This guide will show you how to remove the side buttons on the Microsoft Band 2.

Written By: Chris Syracuse



## INTRODUCTION


In the event that the buttons on the side of the Microsoft Band 2 become jammed or unresponsive, follow this guide to learn how to remove them for cleaning or replacement.

---




### TOOLS:


- [Metal Spudger](#) (1)
  - [Heat Gun](#) (1)
  - [T3 Torx Screwdriver](#) (1)
  - [Tweezers](#) (1)
-

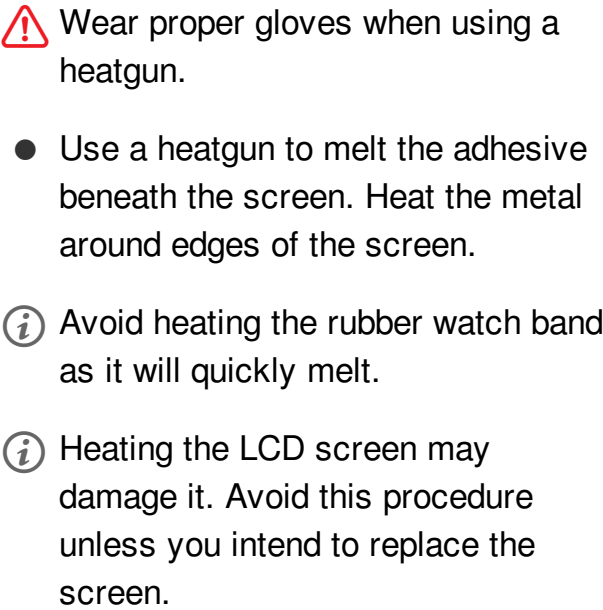

## Step 2

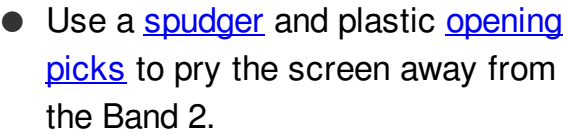

### Step 3

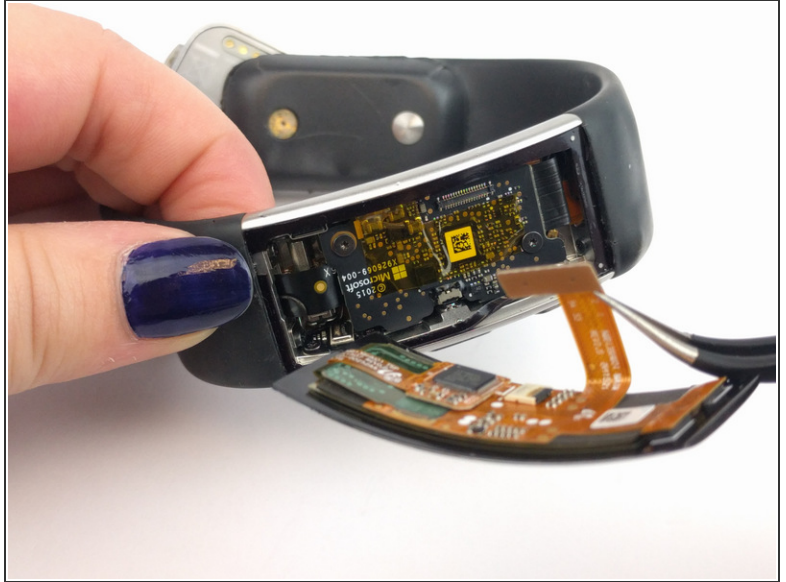

- Use metal tweezers to gently detach the orange press-fit (or "pop") connector.


### Step 4 — Buttons



- Use the T3 Torx Screwdriver to remove the two 2.7 mm screws




## Step 5

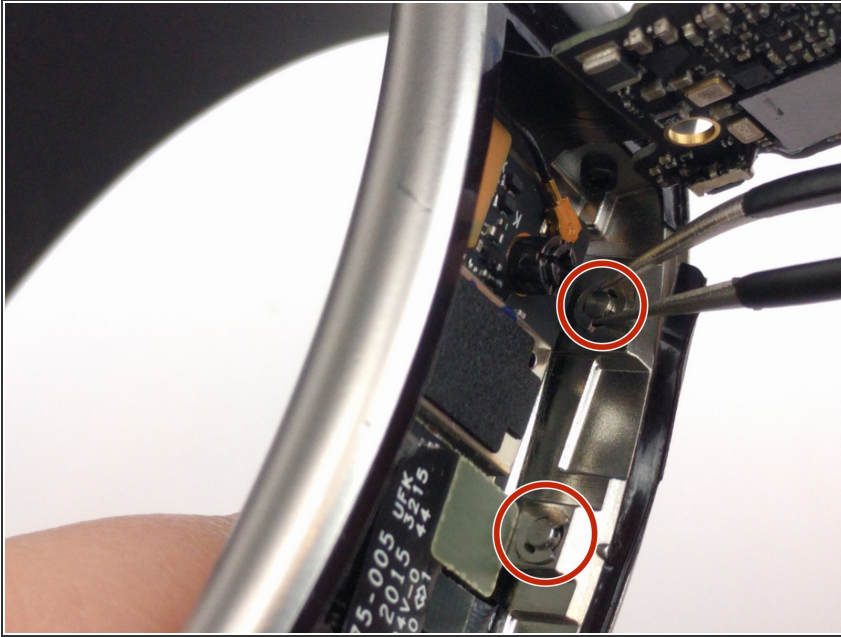

- Lift the logic board and locate the two circular clips securing the buttons from inside the wall of the Band 2. Remove them by sliding the clips sideways.

## Step 6

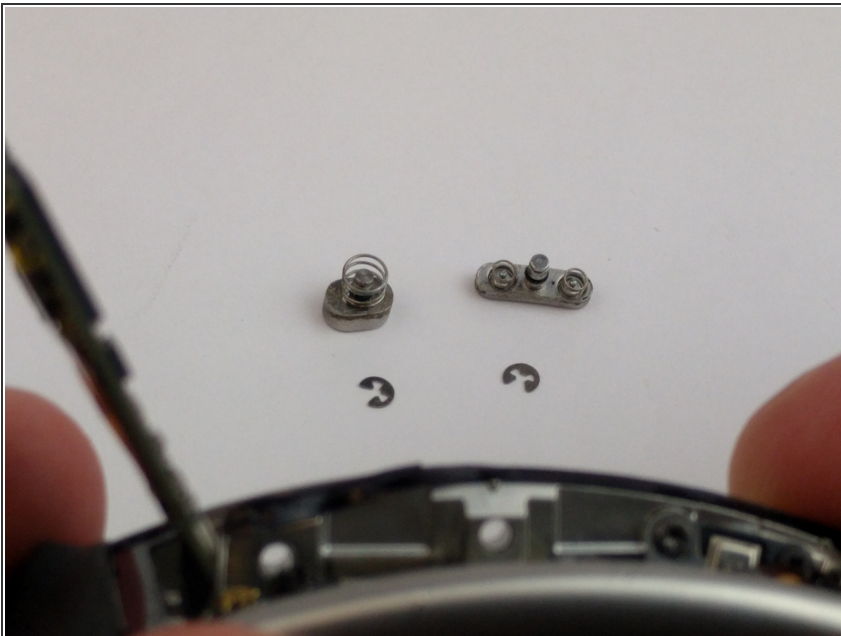

- Remove the buttons, being careful not to lose the springs.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-06-19 11:41:05 AM.